

FANUC ROBODRILL α -DiB Plus series option

Additional 1-axis high-speed rotary table capable of turning

FANUC ROBODRILL DDR-HSiB



Horizontal axis installation



C-axis installation

Max. rotation speed
1,500 min⁻¹ (*1)

Acceleration time
0.47 s (*2)


Max. torque
100 N·m

Clamp torque
600 N·m



Features

- High-speed and high-precision turning by using turning functions of FANUC CNC
- High indexing accuracy and high clamp torque equivalent to **DDRiB**
- Simple initial setting and automatic servo parameter adjustment by loading mass with **DDR** setting screen

Characteristics

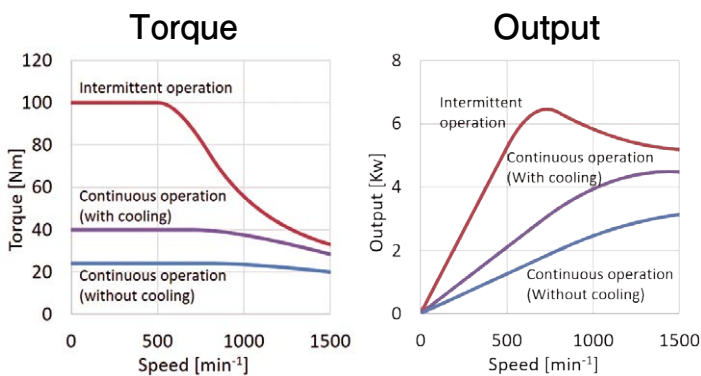

Application example



Rotary joint (option) (*3)


DDR setting screen



Parameter adjustment



Turning function setting



Turning tool clamping unit (*4)

Turning tool


*1 : Maximum rotation speed is 1,500 min⁻¹ regardless of workpiece size and mass (Maximum diameter ϕ 100 mm, Maximum length 100 mm, Maximum mass 7.5 kg)

*2 : Acceleration time from 0 to 1,500 min⁻¹, when loading mass is less than 10 kg and total loading inertia (fixture + workpiece) is less than 0.1 kg·m²


*3 : High-speed type rotary joint option is available for automatic clamping fixture

*4 : Turning tool should be installed with special clamping unit (arranged by end user)

Outer dimensions

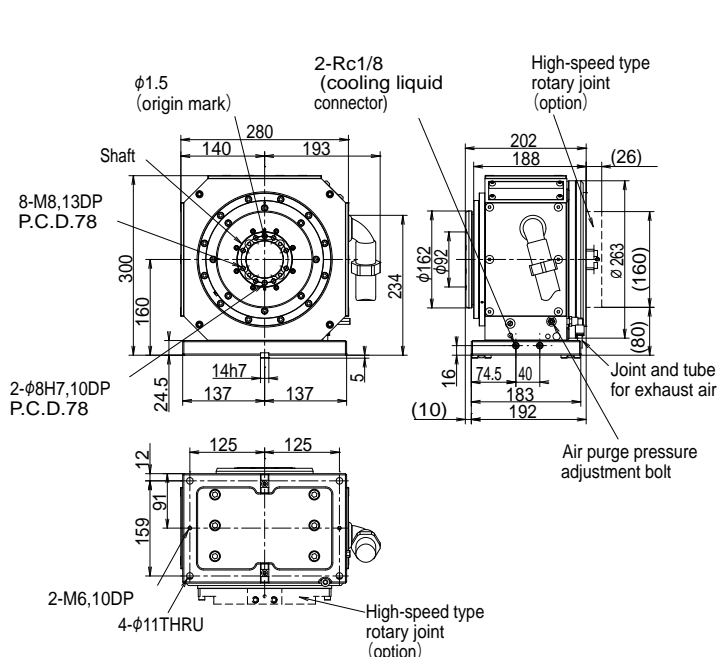



Horizontal axis installation

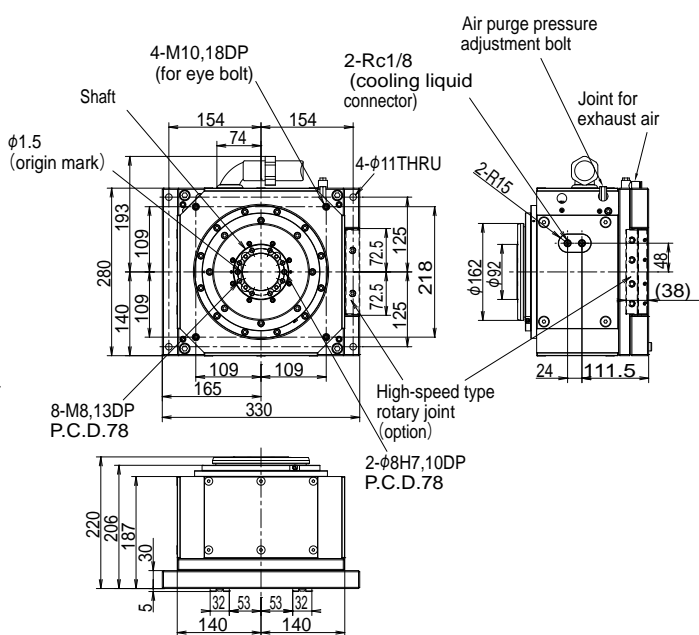

C-axis installation

Specifications

No.	Item	Specification
1	Drive system	Direct drive
2	Cooling system	None / liquid cooling (water, oil)
3	Required ability for liquid cooling	840 W
4	Maximum torque	100 N·m
5	Continuous rating	24 N·m (without cooling) 40 N·m (with cooling)
6	Maximum rotation speed	1,500 min ⁻¹
7	Maximum loading mass	40 kg
8	Allowable workpiece inertia	J = 0.4 kg·m ² (GD ² = 1.6 kgf·m ²)
9	Feedrate	1°/min to 30000°/min
10	Least input increment	0.001° (0.0001° with IS-C setting)
11	Index accuracy	±0.0028° (±10")
12	Indexing time (180°)	0.27 s (loading mass 10 kg and inertia 0.1 kgm ²) 0.31 s (loading mass 20 kg and inertia 0.2 kgm ²) 0.39 s (loading mass 40 kg and inertia 0.4 kgm ²)
13	Clamp system	Air pressure
14	Clamp torque	600 N·m (air pressure 0.5 MPa) 400 N·m (air pressure 0.35 MPa) Unclamp when no air supply

No.	Item	Specification
15	Table inertia	J = 0.02 kg·m ² (GD ² = 0.08 kgf·m ²)
16	Allowable moment load	F ₁ ·L = 250 N·m 
17	Allowable thrust load	F ₂ = 4,000 N 
18	Spindle outside diameter	φ92 mm
19	Spindle hole diameter	φ62 mm through
20	Installation direction	Horizontal / C-axis
21	Center height (horizontal installation)	160 mm
22	Table height (C-axis installation)	220 mm
23	Mass	Horizontal installation: 75 kg (+8.5 kg with rotary joint) C-axis installation: 80 kg (+9 kg with rotary joint)
24	Rotary joint (option)	Number of ports: 3 ·Hydraulic (2 ports) Maximum pressure 5 MPa ·Air (1 port) Maximum pressure 0.5 MPa

FANUC CORPORATION

3580, Shibokusa, Oshino-mura, Minamitsuru-gun, Yamanashi, 401-0597, JAPAN

Phone: (+81)555-84-5555 <https://www.fanuc.co.jp/>

•All specifications are subject to change without notice.
 •No part of this catalog may be reproduced in any form.
 •The photo includes options.
 •The products in this catalog are controlled based on Japan's "Foreign Exchange and Foreign Trade Law". The export of these products from Japan is subject to an export License by the government of Japan.
 Further, re-export to another country may be subject to the license of the government of the country from where the product is re-exported.
 Furthermore, the product may also be controlled by re-export regulations of the United States government.
 •Should you wish to export or re-export these products, please contact FANUC for advice.

