

FANUC Robot ARC Mate 100*i*C

FANUC Robot ARC Mate 120*i*C



FEATURES

FANUC Robot ARC Mate 100*i*C / 120*i*C is the cables integrated arc welding robot.

- ARC Mate 100*i*C Standard type, short arm type (12S), long arm type (7L) and ARC Mate 120*i*C Standard type, long arm type (12L) are available for various application adaptations.
- High rigidity arm and advanced servo technology enable to increase acceleration performance. This decreases cycle time and realizes high productivity.
- The unique drive mechanism in wrist axis realizes the slim arm in torch cable integrated robot.
- Smooth hand cable routing and easy maintenance by cantilevered fore arm provides excellent cable management with stable wire feeding.
- Thanks to stable hand cable management, off-line teaching function by ROBOGUIDE (Option) reduces teaching cost.
- Various intelligent functions with *i*RVision (integrated vision) and Coordinated motion with Positioner are available.

Application Examples




Automobile part arc welding with Servo Torch



Architectural part arc welding with *i*RVision

Operating space

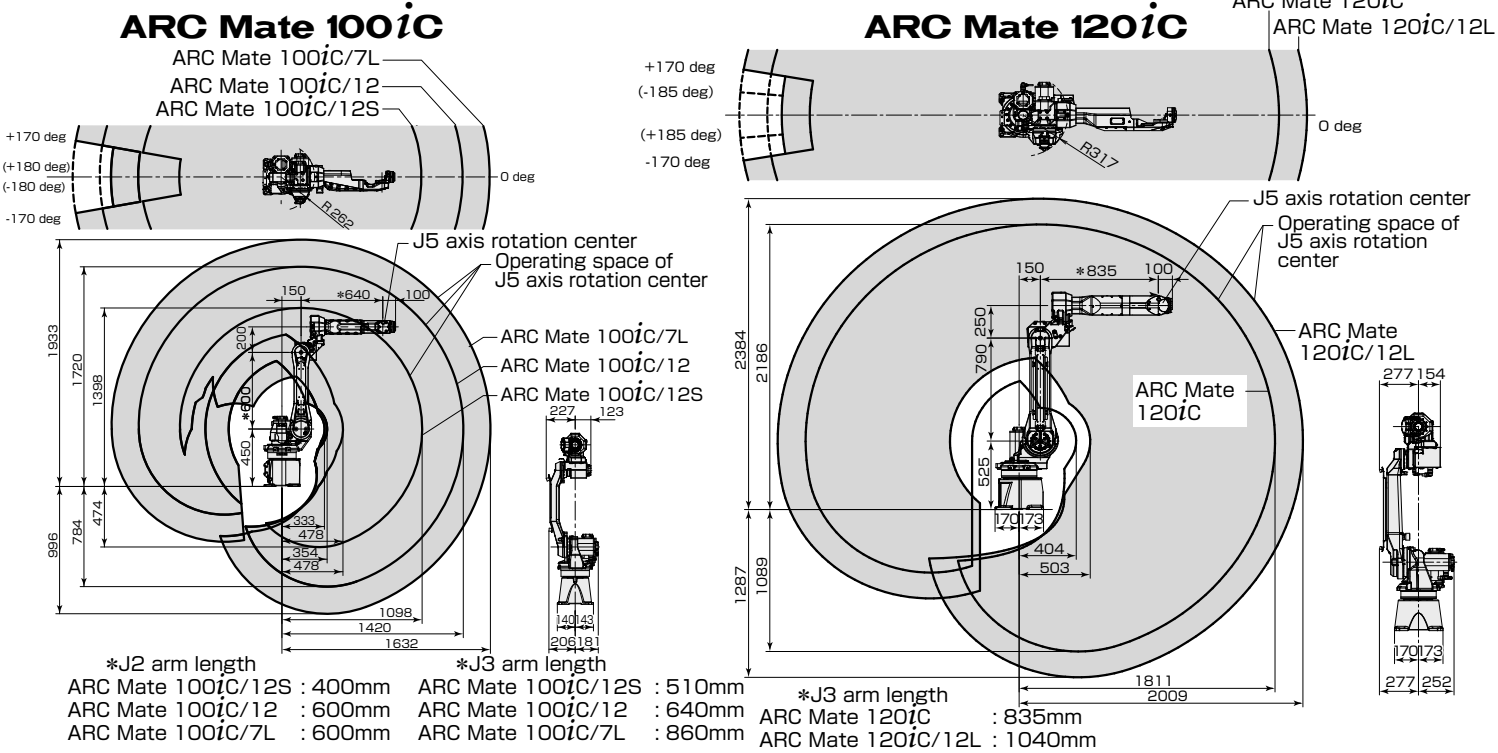

Specifications

Model		ARC Mate 100iC/12S	ARC Mate 100iC/12	ARC Mate 100iC/7L	ARC Mate 120iC	ARC Mate 120iC/12L
Type		6 axes (J1, J2, J3, J4, J5, J6)				
Reach		1098mm	1420mm	1632mm	1811mm	2009mm
Installation		Floor, Upside-down, Angle mount				
Motion range (Maximum speed) Note 1, 2)	J1 axis rotation	340°/360° (option) (260°/s) 5.93 rad/6.28 rad (option) (4.54 rad/s)	340°/360° (option) (230°/s) 5.93 rad/6.28 rad (option) (4.01 rad/s)	340°/360° (option) (195°/s) 5.93 rad/6.45 rad (option) (3.40 rad/s)	340°/370° (option) (200°/s) 5.93 rad/6.45 rad (option) (3.49 rad/s)	340°/370° (option) (200°/s) 5.93 rad/6.45 rad (option) (3.49 rad/s)
	J2 axis rotation	250° (280°/s) 4.36 rad (4.89 rad/s)	250° (225°/s) 4.36 rad (3.93 rad/s)	260° (175°/s) 4.54 rad (3.05 rad/s)		
	J3 axis rotation	340° (315°/s) 5.93 rad (5.50 rad/s)	445° (230°/s) 7.76 rad (4.01 rad/s)	447° (230°/s) 7.80 rad (4.01 rad/s)	458° (180°/s) 8.00 rad (3.14 rad/s)	460° (190°/s) 8.04 rad (3.32 rad/s)
	J4 axis wrist rotation		380° (430°/s) 6.63 rad (7.50 rad/s)		400° (360°/s) 6.98 rad (6.28 rad/s)	400° (430°/s) 6.98 rad (7.50 rad/s)
	J5 axis wrist swing		380° (430°/s) 6.63 rad (7.50 rad/s)		360° (360°/s) 6.28 rad (6.28 rad/s)	360° (430°/s) 6.28 rad (7.50 rad/s)
	J6 axis wrist rotation		720° (630°/s) 12.57 rad (11.0 rad/s)		900° (550°/s) 15.71 rad (9.60 rad/s)	900° (630°/s) 15.71 rad (11.0 rad/s)
Maximum load capacity at wrist		12 kg		7 kg	20 kg	12 kg
Allowable load moment at wrist	J4 axis	22.0 N·m		15.7 N·m	44.0 N·m	22.0 N·m
	J5 axis	22.0 N·m		10.1 N·m	44.0 N·m	22.0 N·m
	J6 axis	9.8 N·m		5.9 N·m	22.0 N·m	9.8 N·m
Allowable load inertia at wrist	J4 axis	0.65 kg·m ²		0.63 kg·m ²	1.04 kg·m ²	0.65 kg·m ²
	J5 axis	0.65 kg·m ²		0.38 kg·m ²	1.04 kg·m ²	0.65 kg·m ²
	J6 axis	0.17 kg·m ²		0.061 kg·m ²	0.28 kg·m ²	0.17 kg·m ²
Repeatability Note 3)		± 0.03 mm				
Mass Note 4)		130 kg		135 kg	250 kg	
Installation environment		Ambient temperature : 0 to 45°C Ambient humidity : Normal 75%RH or less (No dew not frost allowed), Short term 95%RH or less (within one month) Vibration acceleration : 4.9m/s ² (0.5G) or less				

Note 1) In case of angle mounting, J1 and J2 axis motion range are restricted.

Note 2) In case of short distance motion, the axis speed may not reach the maximum value stated.

Note 3) Compliant with ISO 9283.

Note 4) Without controller

FANUC CORPORATION

• Headquarters 3580, Shibokusa, Oshino-mura, Minamitsuru-gun Yamashashi, 401-0597, JAPAN
 Phone: (+81)555-84-5555 <https://www.fanuc.co.jp/>

Overseas Affiliated Companies

FANUC America Corporation
 FANUC Europe Corporation, S.A.
 SHANGHAI-FANUC Robotics CO., LTD.
 KOREA FANUC CORPORATION
 TAIWAN FANUC CORPORATION
 FANUC INDIA PRIVATE LIMITED
 FANUC SINGAPORE PTE. LTD.
 FANUC THAI LIMITED
 FANUC MECHATRONICS (MALAYSIA) SDN. BHD.
 PT. FANUC INDONESIA
 FANUC OCEANIA PTY. LIMITED
 FANUC SOUTH AFRICA (PROPRIETARY) LIMITED

Phone: (+1)248-377-7000
 Phone: (+352)727777-1
 Phone: (+86)21-5032-7700
 Phone: (+82)55-278-1200
 Phone: (+886)4-2359-0522
 Phone: (+91)80-2852-0057
 Phone: (+65)6567-8566
 Phone: (+66)2-714-6111
 Phone: (+60)3-3082-1222
 Phone: (+62)21-4584-7285
 Phone: (+61)2-8822-4600
 Phone: (+27)11-392-3610

<https://www.fanucamerica.com/>
<https://www.fanuc.eu/>
<https://www.shanghai-fanuc.com.cn/>
<https://www.fkc.co.kr/>
<https://www.fanuctaiwan.com.tw/>
<https://www.fanucindia.com/>
<https://www.fanuc.com/fsp/>
<https://www.fanuc.com/ftth/>
<https://www.fanuc.com/fmm/>
<https://www.fanuc.com/fin/>
<https://www.fanucoceania.com.au/>
<https://fanuc.co.za/>

• All specifications are subject to change without notice.
 • No part of this catalog may be reproduced in any form.
 • The products in this catalog are controlled based on Japan's "Foreign Exchange and Foreign Trade Law". The export from Japan may be subject to an export license by the government of Japan. Further, re-export to another country may be subject to the license of the government of the country from where the product is re-exported. Furthermore, the product may also be controlled by re-export regulations of the United States government. Should you wish to export or re-export these products, please contact FANUC for advice.