

FANUC Robot CRX series



CRX-3iA CRX-5iA CRX-10iA CRX-10iA/L CRX-20iA/L CRX-30iA

Safety

- **Contact Stop**

Safely stops with only a light contact with humans




Safety certified to ISO 10218-1
(Including ISO/TS15066)

Ease of Use

- **Manual Guided Teach**

Intuitive and responsive manual guided teach

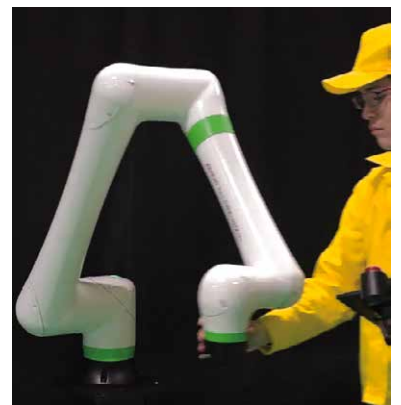

- **Many intelligent functions**

Various intelligent functions, such as integrated robot vision and force sensors, are available

Ease of Use

• Plugin peripheral devices

- CRX Plugin compatible devices are listed on the FANUC web site with links to the device suppliers web site.
- The device suppliers can provide their custom menu and custom icons as plugin software.



Custom menu



Custom icons

• Tablet TP

New Tablet TP Interface



Easy operation focusing on simple functions

iPendant Interface



Full specifications

Timeline

• Icon based programming

New intuitive touch panel user interface



- Drag & drop icons to the timeline to teach



- Touch icons in the timeline to show details
- Modify parameters for commands

High Reliability

• Lifetime Maintenance



- FANUC keeps providing services as long as the customers continue to use our products.
- FANUC stores sufficient spare parts of even discontinued products.

• Maintenance-Free (for 8 years)

- Motors, reducers, sensors, cables, grease, etc.

• Service First

FANUC service team delivers customer trust and confidence based on direction of service "Maximizing Uptime", "Global Service" and "Lifetime maintenance".

Service First

Conforming to the spirit of "Service First", FANUC provides lifetime maintenance to its products for as long as they are used by customers, through more than 270 service locations supporting more than 100 countries and regions throughout the world.

Maximizing Uptime

Global Service

Lifetime Maintenance

- Service and support network all over the world


Lightweight Mechanical Unit

• Easy and safe installation


- Lifting and Installation by two people without requiring lifting equipment (CRX-3iA, CRX-30iA is not included)




Operating Space

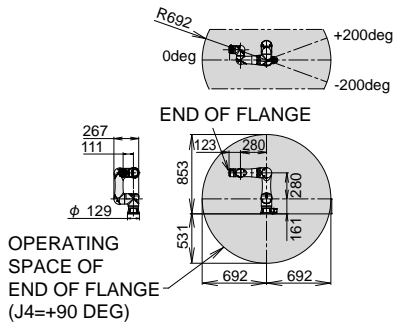


CRX-3iA

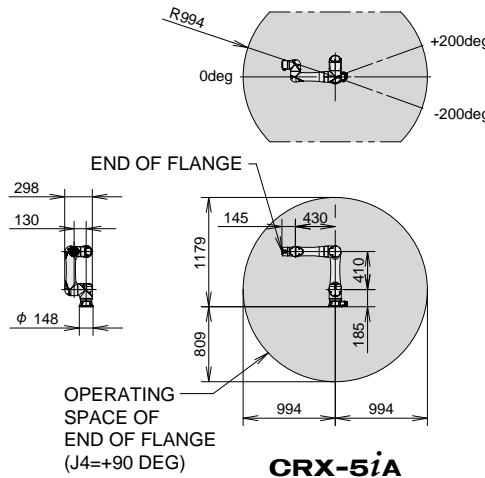


CRX-5iA

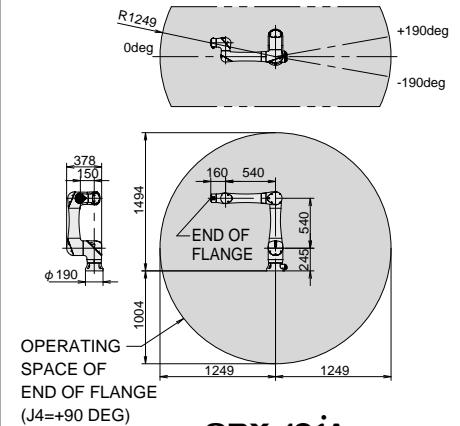

CRX-10iA

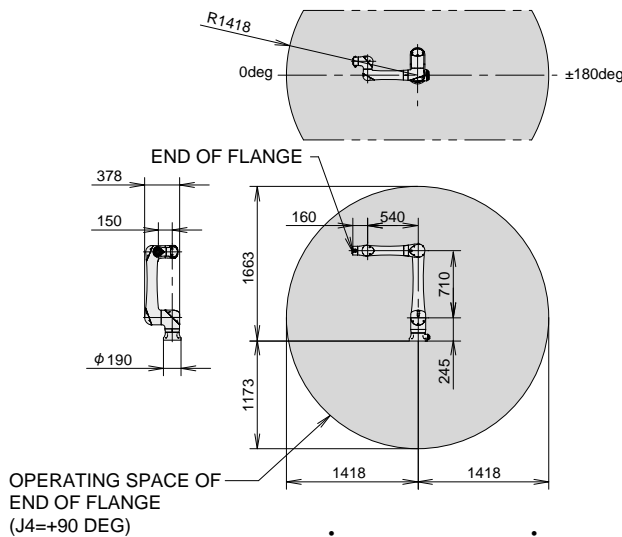

CRX-10iA/L · CRX-20iA/L

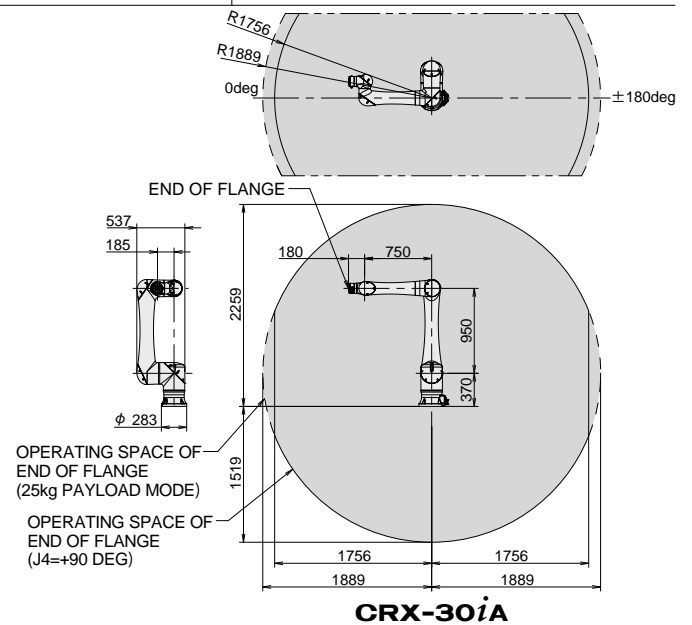

CRX-30iA

Model		CRX-3iA	CRX-5iA	CRX-10iA	CRX-10iA/L	CRX-20iA/L	CRX-30iA
Type		6 axes (J1, J2, J3, J4, J5, J6)					
Reach		692 mm	994 mm	1249 mm	1418 mm	1418 mm	1756 mm (1889 mm Note 6)
Installation		Floor, Upside-down, Angle mount					
Maximum speed (Note 1, 2)	Collaborative mode	1200 mm/s	1000 mm/s	1000 mm/s		1000 mm/s	1000 mm/s
	High speed mode	2500 mm/s	2000 mm/s	2000 mm/s		1000 mm/s	2000 mm/s
Max. load capacity at wrist		3 kg	5 kg	10 kg	20 kg	30 kg (25 kg Note 6)	
Allowable load moment at wrist	J4 axis	8.50 Nm	19.0 Nm	34.8 Nm	70.0 Nm	115.0 Nm (100.0 Nm Note 7)	
	J5 axis	6.50 Nm	15.4 Nm	26.0 Nm	64.0 Nm	85.0 Nm	
	J6 axis	4.00 Nm	6.7 Nm	11.0 Nm	30.0 Nm	32.0 Nm	
Allowable load inertia at wrist	J4 axis	0.32 kg·m ²	0.77 kg·m ²	1.28 kg·m ²	4.00 kg·m ²	4.70 kg·m ²	
	J5 axis	0.24 kg·m ²	0.50 kg·m ²	0.90 kg·m ²	4.00 kg·m ²	4.00 kg·m ²	
	J6 axis	0.08 kg·m ²	0.10 kg·m ²	0.30 kg·m ²	2.00 kg·m ²	2.00 kg·m ²	
Repeatability (Note 3)		±0.02 mm	±0.03 mm	±0.04 mm		±0.04 mm	±0.05 mm
Mass (Note 4)		11 kg	25 kg	40 kg		41 kg	135 kg
Noise (Note 5)		70 dB or less					
Degree of protection		Conform to IP67					
Cleanliness		-	ISO Class 4	ISO Class 2	ISO Class 3	ISO Class 3	ISO Class 2
Installation environment		Ambient temperature : 0 to 45°C Ambient humidity : Normally 75%RH or less (No condensation allowed) : Short term (Within one month) 95%RH or less (No condensation allowed) Vibration acceleration : 4.9m/s ² (0.5G) or less					
Matching controller R-30iB Mini Plus	Rated Voltage	100 to 120 VAC, 200 to 240 VAC Single phase +10% -15%, 50/60Hz					
	Input power source capacity	1.5 kVA					
	Mass of controller	20 kg					22 kg
	Dimensions (WxDxH)	410×277×370 mm					
	Degree of protection	IP54					

Note 1) During short distance motions, the axis speed may not reach the maximum value stated.
Note 2) It is necessary to set a motion speed according to risk assesment of system.
Note 3) Compliant with ISO9283.
Note 4) Without controller.

Note 5) This value is equivalent continuous A-weighted sound pressure level, which applied with ISO11201(EN31201).
This value is measured with the following conditions:
- Maximum load and speed
- Operating mode is AUTO

Note 6) The operating space is expanded when 25kg payload mode is selected. (CRX-30iA)
Note 7) J4-axis allowable load moment when 25kg payload mode is selected. (CRX-30iA)

Food Grade Variant, Paint Variant

- Food grade variant is supported for all models.
- Paint variant is supported.



CRX-5iA

CRX-10iA

CRX-10iA/L

CRX-20iA/L

CRX-30iA

CRX-10iA/L Paint

FANUC WEB Site

FANUC
WEB Site
Home



CRX



Peripheral
Devices for
Plugin



Application
Examples



YouTube



FANUC CORPORATION

● Overseas Affiliated Companies

FANUC America Corporation
FANUC Europe Corporation, S.A.
SHANGHAI-FANUC Robotics CO., LTD.
KOREA FANUC CORPORATION
TAIWAN FANUC CORPORATION
FANUC INDIA PRIVATE LIMITED
FANUC SINGAPORE PTE. LTD.
FANUC THAI LIMITED
FANUC MECHATRONICS (MALAYSIA) SDN. BHD.
PT. FANUC INDONESIA
FANUC OCEANIA PTY. LIMITED
FANUC SOUTH AFRICA (PROPRIETARY) LIMITED

Phone: (+1)248-377-7000
Phone: (+352)727777-1
Phone: (+86)21-5032-7700
Phone: (+82)55-278-1200
Phone: (+886)4-2359-0522
Phone: (+91)80-2852-0057
Phone: (+65)6567-8566
Phone: (+66)2-714-6111
Phone: (+60)3-3082-1222
Phone: (+62)21-4584-7285
Phone: (+61)2-8822-4600
Phone: (+27)11-392-3610

<https://www.fanucamerica.com/>
<https://www.fanuc.eu/>
<https://www.shanghai-fanuc.com.cn/>
<https://www.fkc.co.kr/>
<https://www.fanuctaiwan.com.tw/>
<https://www.fanucindia.com/>
<https://www.fanuc.com/fsp/>
<https://www.fanuc.com/fth/>
<https://www.fanuc.com/fmm/>
<https://www.fanuc.com/fin/>
<https://www.fanucoceania.com.au/>
<https://fanuc.co.za/>

● Headquarters 3580, Shibokusa, Oshino-mura, Minamitsuru-gun
Yamanashi, 401-0597, JAPAN
Phone: (+81)555-84-5555 <https://www.fanuc.co.jp/>

● All specifications are subject to change without notice.
● No part of this catalog may be reproduced in any form.
● The products in this catalog are controlled based on Japan's "Foreign Exchange and Foreign Trade Law". The export from Japan may be subject to an export license by the government of Japan. Further, re-export to another country may be subject to the license of the government of the country from where the product is re-exported. Furthermore, the product may also be controlled by re-export regulations of the United States government. Should you wish to export or re-export these products, please contact FANUC for advice.

© FANUC CORPORATION, 2022
RCRALL(E)-07, 2025.11, Printed in Japan