

FANUC Robot DR series



The FANUC Robot DR Series is designed for high speed operation, incorporating FANUC's advanced technologies. It supports customers in fields such as logistics and mass production, where handling large volumes of products is required, including applications such as conveying and arranging items between conveyors.

FEATURES

DR/05

These models are light weight and compact high speed assembly robots.

- Installation types of no stand, desktop stand and ceiling mount are selectable.
- A variety of wrist configurations (6 or 4 axes) and operating area (standard or long arm) are selectable to meet different application needs.
- A camera for *i*RVision (integrated vision) can be integrated in the mechanical unit.


DR/3, /6, /8, /12

These are parallel link robots for high speed picking and assembly.


- The enclosed structure realizes IP67 environmental resistance (water/dust proof). There are also IP69K options which withstand high-pressure washing (DR/3, DR/6-12B, DR/8-16B).
- NSF H1 food grade oil/grease are applied as lubricants for all robot types. Materials and surface finishing for food sanitary can be selected (options).
- The metal surface of DR/6-12B Stainless and DR/8-16B Stainless are all stainless and can withstand daily washdown / sterilization. These robots can be operated more hygienically.

Operating space

DR/3-8A

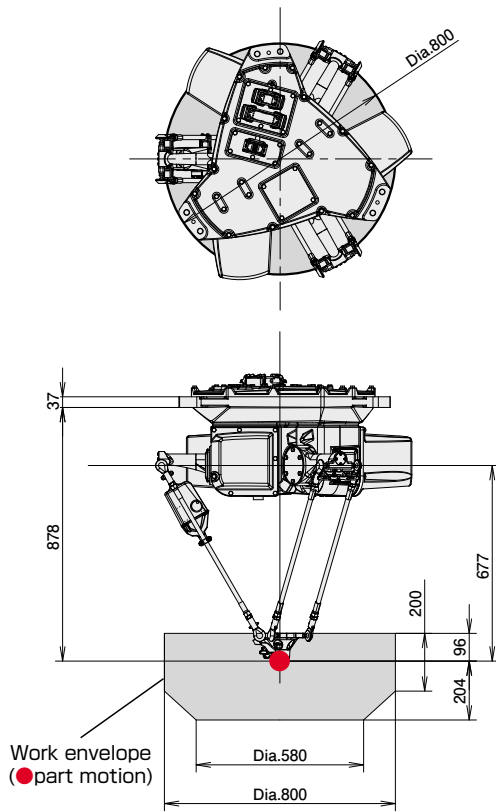

DR/3-11A

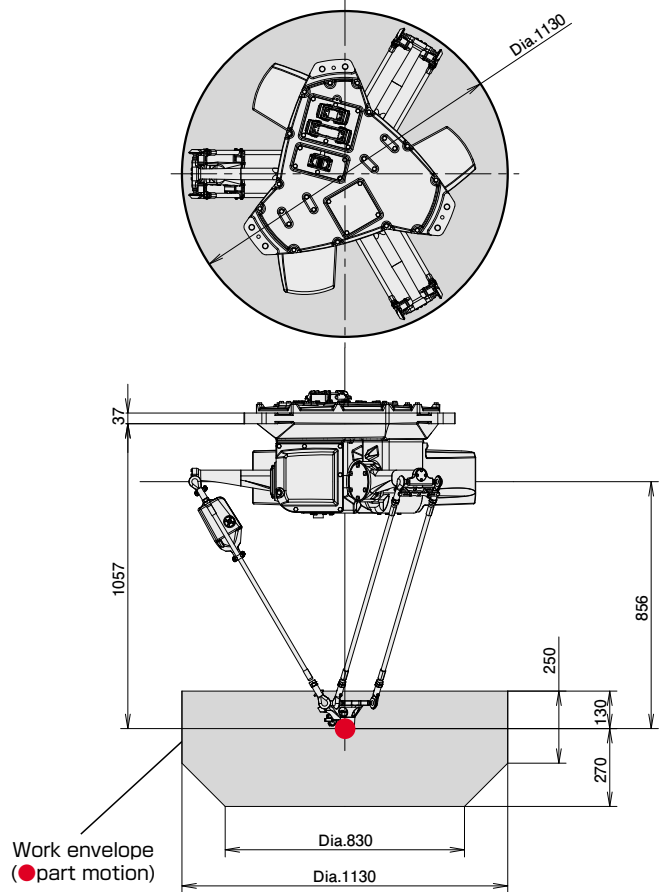

Specifications

Model		DR/3-8A	DR/3-11A
Type		Parallel link mechanism	
Controlled axes		4 axes (J1, J2, J3, J4)	
Installation		Ceiling mount	
Motion range (Maximum speed) Note 1)	J1-J3	Diameter 800 mm, height 300 mm	Diameter 1130 mm, height 400 mm
	J4	720° (3500°/s)	12.57 rad (61.06rad/s)
Max.payload at wrist		3 kg	
Repeatability Note 2)		± 0.03 mm	
Dust proof and drip proof mechanism		Conform to IP67, IP69K (Option)	
Drive method		Electric servo drive by servo motor	
Mass Note 3)		130 kg	
Installation environment		Ambient temperature : 0 to 45°C Ambient humidity Normally 75%RH or less (No dew, nor frost allowed.) Short term (Within one month) 95%RH or less (No condensation allowed.) Vibration : 4.9m/s ² (0.5G) or less	



Note 1) During short distance motions, the axis speed may not reach the maximum value stated.

Note 2) Compliant with ISO9283.



Note 3) Without controller.

Operating space

DR/6-14A

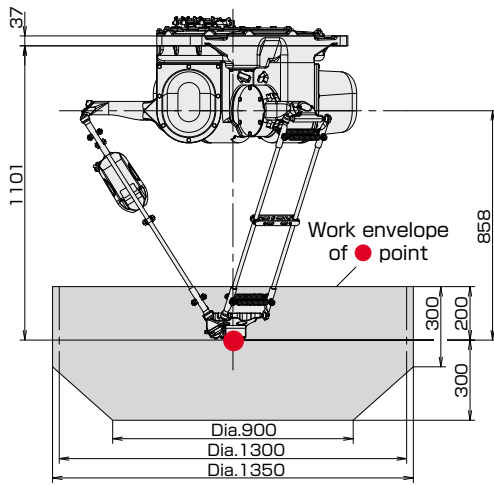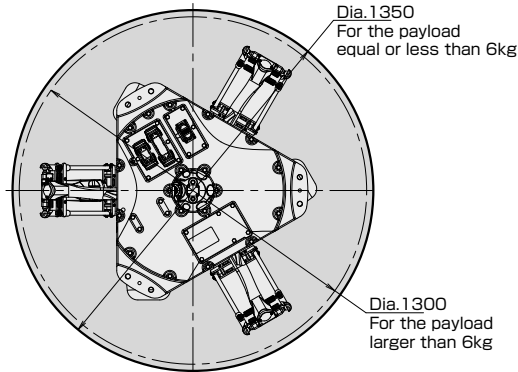

DR/12-14A-3X

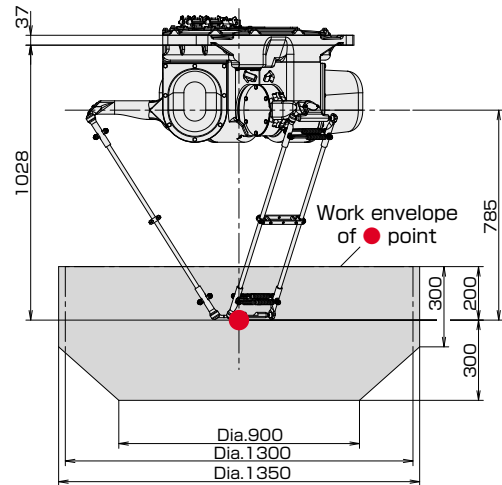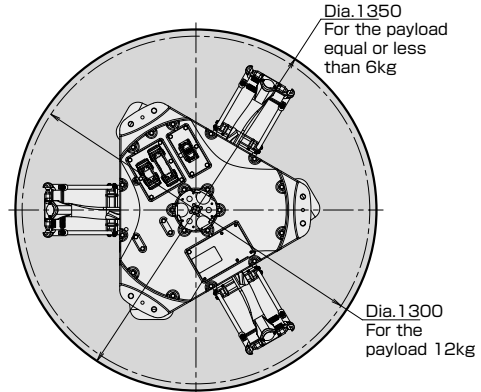

Specifications

Model		DR/6-14A	DR/12-14A-3X
Type		Parallel link mechanism	
Controlled axes		4 axes (J1, J2, J3, J4)	3 axes (J1, J2, J3)
Installation		Ceiling mount	
Motion range (Maximum speed) Note 1)	J1-J3	Diameter 1350 mm, height 500 mm Note 4)	
	J4	720° (4000°/s) 12.57 rad (69.81 rad/s)	—
Max.payload at wrist		6 kg (8 kg with an option)	12 kg
Repeatability Note 2)		±0.03 mm	
Dust proof and drip proof mechanism		Conform to IP67	
Drive method		Electric servo drive by servo motor	
Mass Note 3)		160 kg	155 kg
Installation environment		Ambient temperature : 0 to 45°C Ambient humidity Normally 75%RH or less (No dew, nor frost allowed.) Short term (Within one month) 95%RH or less (No condensation allowed.) Vibration : 4.9m/s ² (0.5G) or less	

Note 1) During short distance motions, the axis speed doesn't reach maximum one.

Note 2) Compliant with ISO9283.

Note 3) Without controller.


Note 4) In case the payload is larger than 6 kg, there is a limitation on the work envelope.

Operating space

DR/6-12B Stainless

DR/8-16B Stainless

DR/8-16B

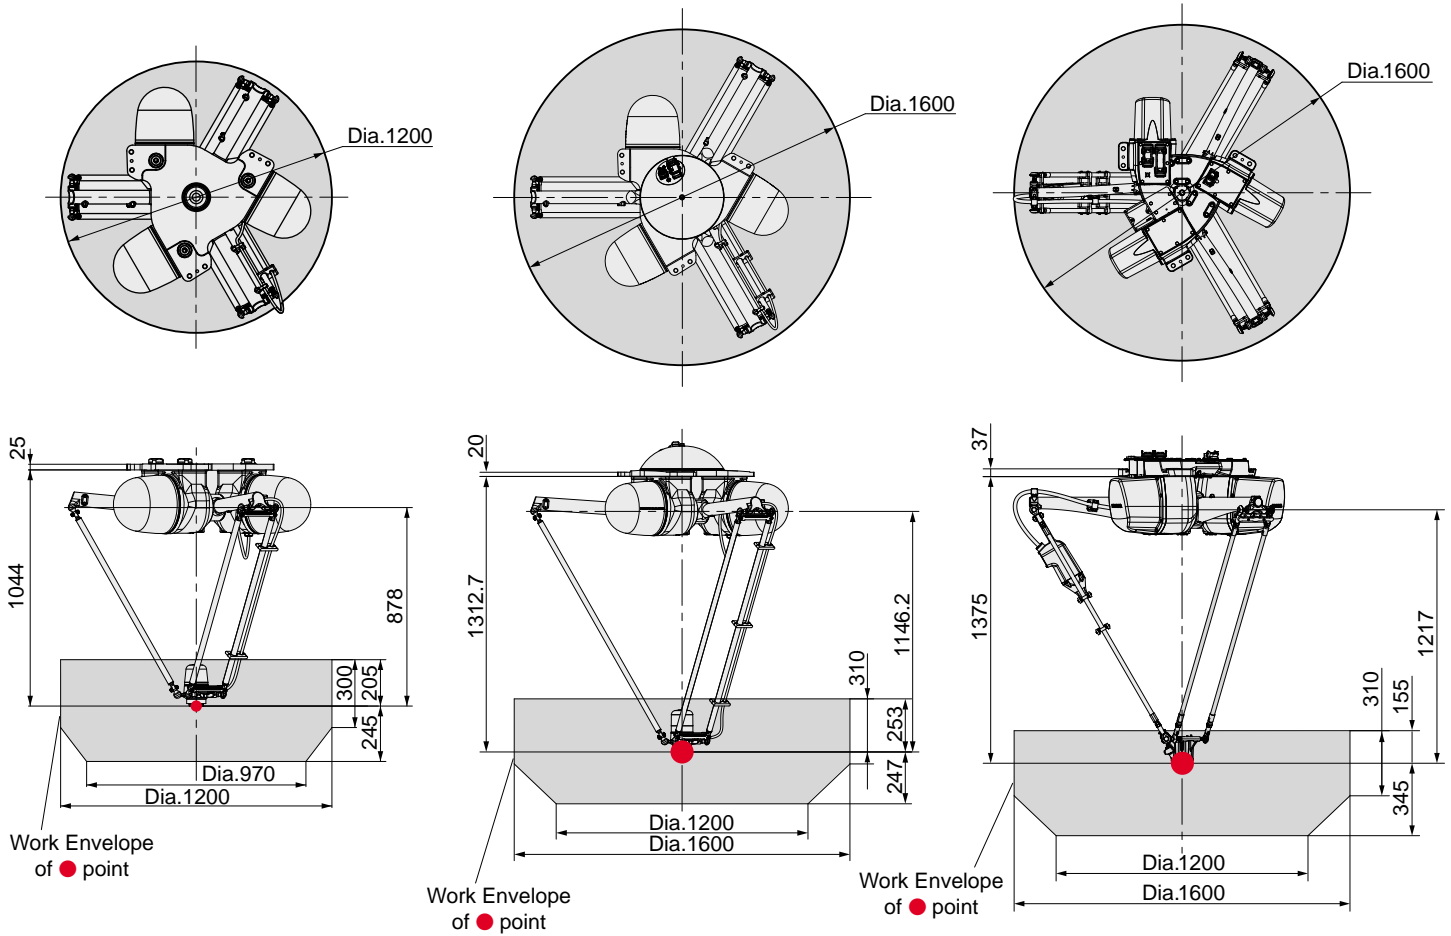

Specifications

Model	DR/6-12B Stainless DR/6-12B Stainless/Mirror Note 4)	DR/8-16B Stainless/Mirror	DR/8-16B DR/8-16B Plated Note 5)
Type	Parallel link mechanism		
Controlled axes	4 axes (J1, J2, J3, J4)		
Installation	Ceiling mount		
Motion range (Maximum speed) Note 1)	J1-J3 Diameter 1200 mm, height 450 mm	Diameter 1600 mm, height 500 mm	
	J4 720° (1714°/s) 12.57 rad (29.91rad/s)	720° (2000°/s) 12.57 rad (34.91rad/s)	
Max.payload at wrist	6 kg	8 kg	
Repeatability Note 2)	±0.03 mm		
Dust proof and drip proof mechanism	Conform to IP69K		
Drive method	Electric servo drive by servo motor		
Mass Note 3)	250 kg	260 kg	170 kg
Installation environment	Ambient temperature : 0 to 45°C Ambient humidity Normally 75%RH or less (No condensation allowed.) Short term (Within one month) 95%RH or less (No condensation allowed.) Vibration : 4.9m/s ² (0.5G) or less		

Note 1) During short distance motions, the axis speed may not reach the maximum value stated.

Note 2) Compliant with ISO9283.




Note 3) Without controller.

Note 4) Mirror finish type.

Note 5) Plating finish type.


Operating space

DR/05-3A, /05-3A-6X

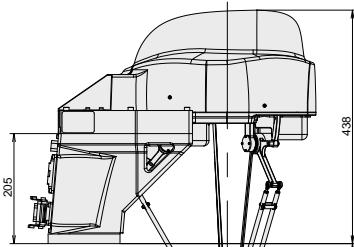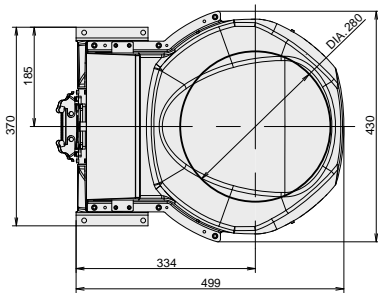


3A-6X

Work envelope
(●part motion)






3A

Work envelope
(●part motion)





DR/05-4A, /05-4A-6X

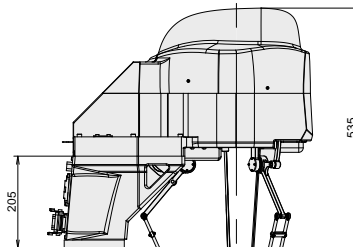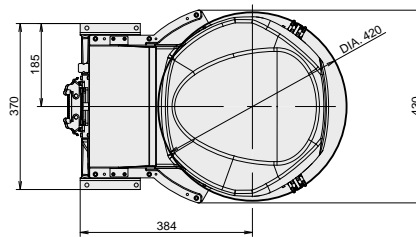

4A-6X

Work envelope
(●part motion)



4A

Work envelope
(●part motion)



Specifications

Model		DR/05-3A-6X	DR/05-3A
Type		Parallel link mechanism	
Controlled axes		6 axes (J1, J2, J3, J4, J5, J6)	4 axes (J1, J2, J3, J4)
Installation		Floor, angle and ceiling mount	Floor and ceiling mount
Motion range (Maximum speed) Note 1)	J1-J3	Diameter 280 mm, height 100 mm	
	J4	720° (1440°/s) 12.57 rad (25.13 rad/s)	720° (3000°/s) 12.57 rad (52.34 rad/s)
	J5	300° (1440°/s) 5.24 rad (25.13 rad/s)	—
	J6	720° (1440°/s) 12.57 rad (25.13 rad/s)	—
Max.payload at wrist		0.5 kg (1 kg with an option)	
Repeatability Note 2)		±0.02 mm	
Dust proof and drip proof mechanism		Conform to IP20	
Drive method		Electric servo drive by servo motor	
Mass Note 3)		17 kg	14 kg
Installation environment		Ambient temperature : 0 to 45°C Ambient humidity Normally 75%RH or less (No dew, nor frost allowed.) Short term (Within one month) 95%RH or less (No condensation allowed.) Vibration : 4.9m/s ² (0.5G) or less	

Model		DR/05-4A-6X	DR/05-4A
Type		Parallel link mechanism	
Controlled axes		6 axes (J1, J2, J3, J4, J5, J6)	4 axes (J1, J2, J3, J4)
Installation		Floor, angle and ceiling mount	Floor and ceiling mount
Motion range (Maximum speed) Note 1)	J1-J3	Diameter 420 mm, height 150 mm	
	J4	720° (1440°/s) 12.57 rad (25.13 rad/s)	720° (3000°/s) 12.57 rad (52.34 rad/s)
	J5	300° (1440°/s) 5.24 rad (25.13 rad/s)	—
	J6	720° (1440°/s) 12.57 rad (25.13 rad/s)	—
Max.payload at wrist		0.5 kg (1 kg with an option)	
Repeatability Note 2)		±0.02 mm	
Dust proof and drip proof mechanism		Conform to IP20	
Drive method		Electric servo drive by servo motor	
Mass Note 3)		20 kg	17 kg
Installation environment		Ambient temperature : 0 to 45°C Ambient humidity Normally 75%RH or less (No dew, nor frost allowed.) Short term (Within one month) 95%RH or less (No condensation allowed.) Vibration : 4.9m/s ² (0.5G) or less	

Note 1) During short distance motions, the axis speed may not reach the maximum value stated.

Note 2) Compliant with ISO9283.


Note 3) In case of "No stand"

Space saving DR/05



Work envelope is closed around operation object so that the total installation space can be minimized. It enables to place the robot and the worker along the manufacturing line effectively.



R140
(R210 for long arm)




General articulated robot working space

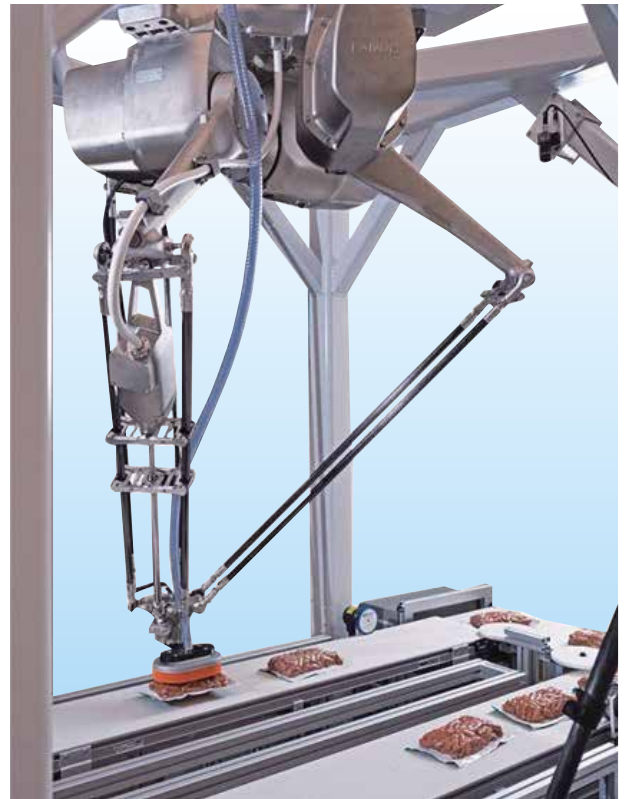

Pouched goods arranging by DR/8-16B Plated



High speed arranging the foods by DR/6-14A

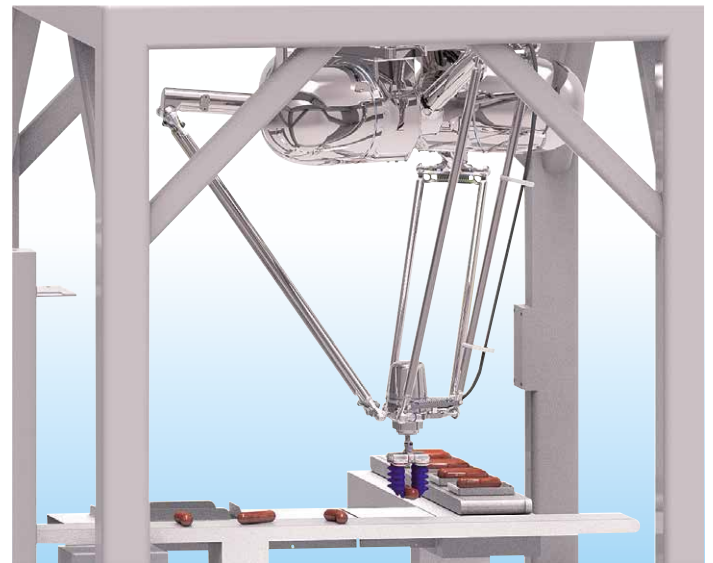

Fresh food arranging by DR/6-12B Stainless/Mirror

FANUC CORPORATION

● Overseas Affiliated Companies

FANUC America Corporation
 FANUC Europe Corporation, S.A.
 SHANGHAI-FANUC Robotics CO., LTD.
 KOREA FANUC CORPORATION
 TAIWAN FANUC CORPORATION
 FANUC INDIA PRIVATE LIMITED
 FANUC SINGAPORE PTE. LTD.
 FANUC THAI LIMITED
 FANUC MECHATRONICS (MALAYSIA) SDN. BHD.
 PT. FANUC INDONESIA
 FANUC OCEANIA PTY. LIMITED
 FANUC SOUTH AFRICA (PROPRIETARY) LIMITED

Phone: (+1)248-377-7000
 Phone: (+352)727777-1
 Phone: (+86)21-5032-7700
 Phone: (+82)55-278-1200
 Phone: (+886)4-2359-0522
 Phone: (+91)80-2852-0057
 Phone: (+65)6567-8566
 Phone: (+66)2-714-6111
 Phone: (+60)3-3082-1222
 Phone: (+62)21-4584-7285
 Phone: (+61)2-8822-4600
 Phone: (+27)11-392-3610

● Headquarters 3580, Shibokusa, Oshino-mura, Minamitsuru-gun
 Yamanashi, 401-0597, JAPAN
 Phone: (+81)555-84-5555 <https://www.fanuc.co.jp/>

<https://www.fanucamerica.com/>
<https://www.fanuc.eu/>
<https://www.shanghai-fanuc.com.cn/>
<https://www.fkc.co.kr/>
<https://www.fanuctaiwan.com.tw/>
<https://www.fanucindia.com/>
<https://www.fanuc.com/fsp/>
<https://www.fanuc.com/ftth/>
<https://www.fanuc.com/fmm/>
<https://www.fanuc.com/fin/>
<https://www.fanucoceania.com.au/>
<https://fanuc.co.za/>

● All specifications are subject to change without notice.
 ● No part of this catalog may be reproduced in any form.
 ● The products in this catalog are controlled based on Japan's "Foreign Exchange and Foreign Trade Law". The export from Japan may be subject to an export license by the government of Japan. Further, re-export to another country may be subject to the license of the government of the country from where the product is re-exported. Furthermore, the product may also be controlled by re-export regulations of the United States government. Should you wish to export or re-export these products, please contact FANUC for advice.