


FANUC Robot M-3iA

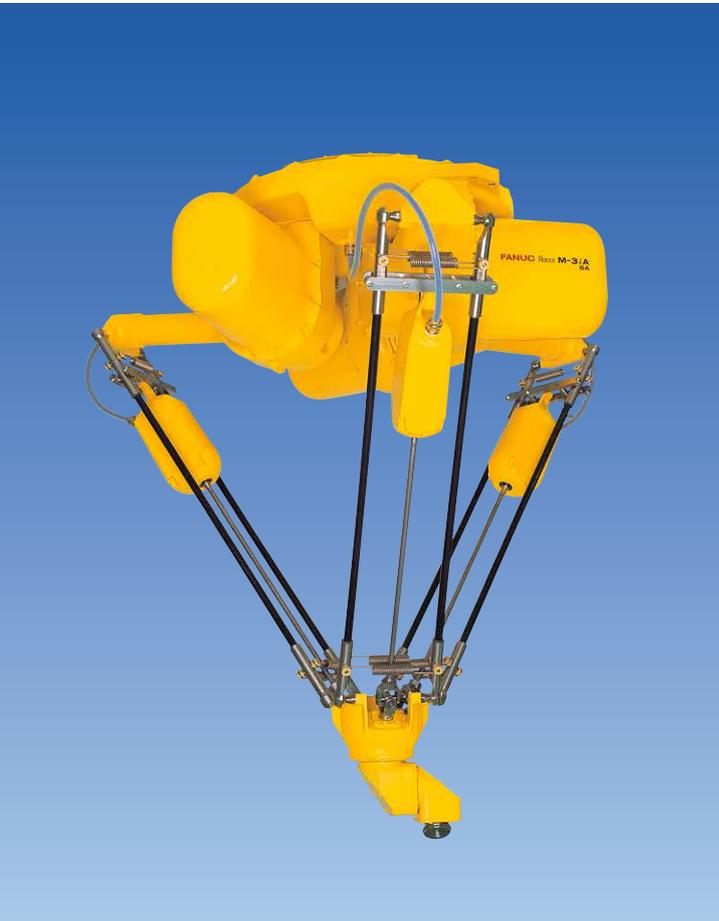

FEATURES

FANUC Robot M-3iA is a large-sized parallel link robot for high speed picking and assembly. The exclusive 6 axes type of parallel link robot expanded robotization of transferring and assembling application.

- Three models are available to meet a variety of applications.
 - FANUC Robot M-3iA/6S
Total 4 axes robot including single axis rotation at wrist. The maximum payload is 8kg (option), suitable for high speed arranging and handling of multi work pieces at the same time on the conveyer.
 - FANUC Robot M-3iA/6A
Total 6 axes robot including three rotation axes at wrist. This model can change wrist direction freely and suitable for assembling application.
 - FANUC Robot M-3iA/12H
Total 3 axes and 12kg payload robot without rotation axes at wrist. This model is suitable for high speed picking of plenty work pieces on the conveyer.
- IP67 of enclosed mechanical unit realized reliable water and dust proof ability.
- Food adaptation option is available that adopts suitable material, high durability surface treatment and food grade lubricant. It will progress robotization of food market.
- Various intelligent functions are available, such as *i*RVision (integrated vision) and *i*RPickTool.

Application Examples



Standing the bottles by M-3iA/6A




High speed arranging the foods by M-3iA/6S

Operating space

M-3iA/6S

M-3iA/6A

M-3iA/12H

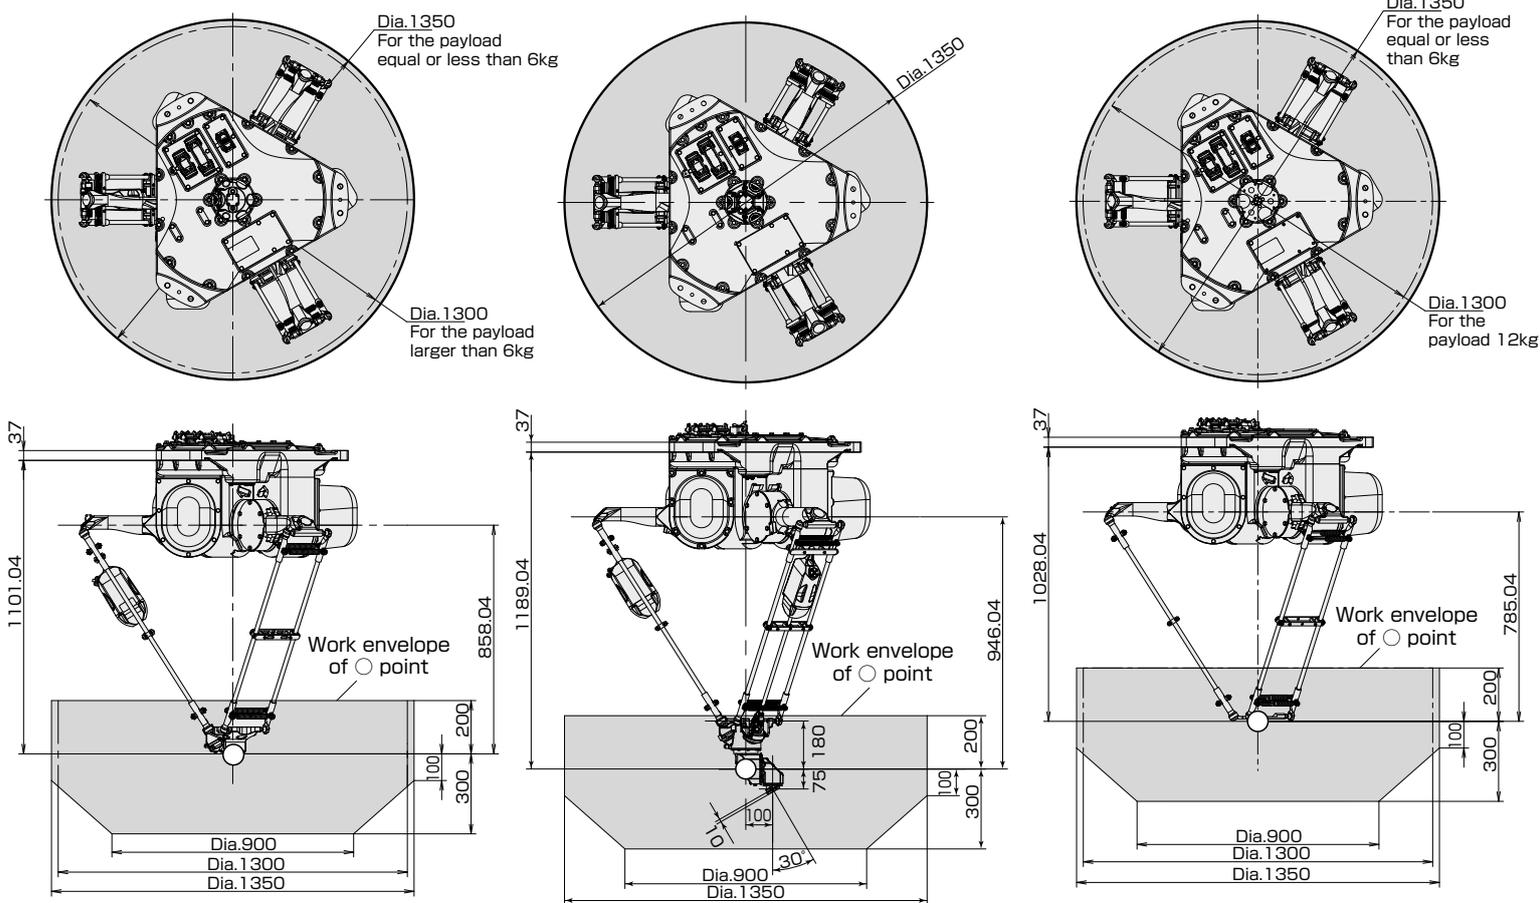

Specifications

Model	M-3iA/6S	M-3iA/6A	M-3iA/12H
Type		Parallel link mechanism	
Controlled axes	4 axes (J1, J2, J3, J4)	6axes (J1, J2, J3, J4, J5, J6)	3axes (J1, J2, J3)
Installation	Ceiling mount		
Motion range (Maximum speed) Note 1)	J1-J3 J4 J5 J6	Diameter 1,350 mm, height 500 mm Note 4)	
Max. payload at wrist	6 kg (8 kg with an option)	6 kg	12 kg
Repeatability Note 2)	±0.03 mm		
Drive method	Electric servo drive by AC servo motor		
Mass Note 3)	160 kg	175 kg	155 kg
Installation environment	Ambient temperature : 0 to 45°C Ambient humidity Normally : 75%RH or less (No dew, nor frost allowed) Short term : Max. 95%RH or less (within one month) Vibration : 4.9m/s ² (0.5G) or less		

Note 1) During short distance motions, the axis speed doesn't reach maximum one.

Note 2) Compliant with ISO9283.

Note 3) Without controller.

Note 4) For M-3iA/6S and M-3iA/12H, in case the payload is larger than 6 kg, there is a limitation on the work envelope.

FANUC CORPORATION

●Headquarters 3580, Shibokusa, Oshino-mura, Minamitsuru-gun
Yamanashi, 401-0597, JAPAN
Phone: (+81)555-84-5555 <https://www.fanuc.co.jp/>

●Overseas Affiliated Companies

FANUC America Corporation
FANUC Europe Corporation, S.A.
SHANGHAI-FANUC Robotics CO., LTD.
KOREA FANUC CORPORATION
TAIWAN FANUC CORPORATION
FANUC INDIA PRIVATE LIMITED
FANUC SINGAPORE PTE. LTD.
FANUC THAI LIMITED
FANUC MECHATRONICS (MALAYSIA) SDN. BHD.
PT. FANUC INDONESIA
FANUC OCEANIA PTY. LIMITED
FANUC SOUTH AFRICA (PROPRIETARY) LIMITED

Phone: (+1)248-377-7000
Phone: (+352)727777-1
Phone: (+86)21-5032-7700
Phone: (+82)55-278-1200
Phone: (+886)4-2359-0522
Phone: (+91)80-2852-0057
Phone: (+65)6567-8566
Phone: (+66)2-714-6111
Phone: (+60)3-3082-1222
Phone: (+62)21-4584-7285
Phone: (+61)2-8822-4600
Phone: (+27)11-392-3610

<https://www.fanucamerica.com/>
<https://www.fanuc.eu/>
<https://www.shanghai-fanuc.com.cn/>
<https://www.fkc.co.kr/>
<https://www.fanuctaiwan.com.tw/>
<https://www.fanucindia.com/>
<https://www.fanuc.com/fsp/>
<https://www.fanuc.com/ftth/>
<https://www.fanuc.com/fmm/>
<https://www.fanuc.com/fin/>
<https://www.fanucoceania.com.au/>
<https://fanuc.co.za/>

- All specifications are subject to change without notice.
- No part of this catalog may be reproduced in any form.
- The products in this catalog are controlled based on Japan's "Foreign Exchange and Foreign Trade Law". The export from Japan may be subject to an export license by the government of Japan. Further, re-export to another country may be subject to the license of the government of the country from where the product is re-exported. Furthermore, the product may also be controlled by re-export regulations of the United States government. Should you wish to export or re-export these products, please contact FANUC for advice.