

FANUC

ROBOT

GENERAL CATALOG



Solve Your Labor Shortages With FANUC Robots!



65 years of experience with CNC and more than 45 years of experience with industrial robots.
More than 1 million robots shipped worldwide.

High Reliability

- In-house design and manufacture (mechanical arms, servo motors, controllers, software and sensors), with thorough testing.



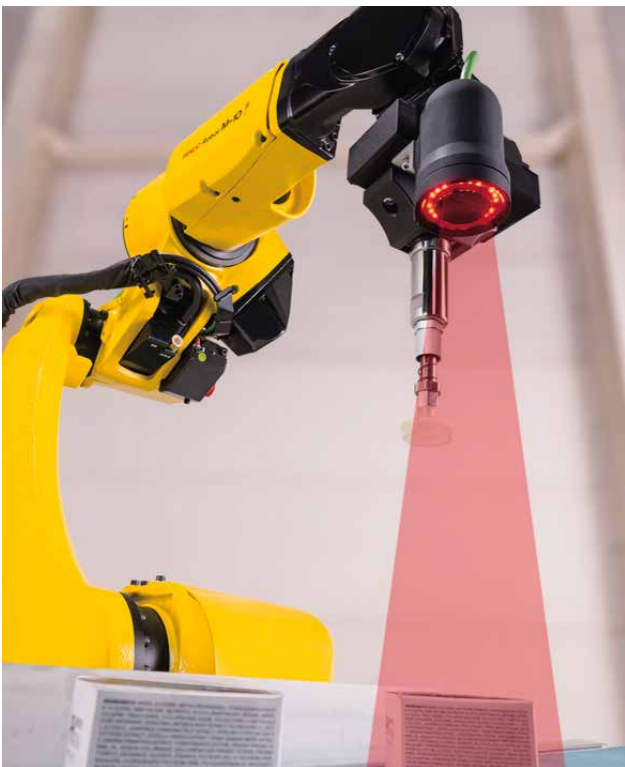
Easy to use and Safe Robot

- Intuitive and Easy to use even for novice users.
- Safely stops with light force.
- Easy installation.



AI robot to solve labor shortage

- No additional hardware, easy to use integrated robot vision.
- FANUC supports for both robots and vision.
- Reduce jig and equipment costs with FANUC robots.



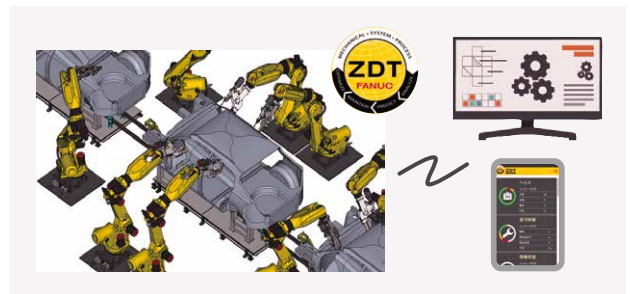
Visualize designs with ROBOGUIDE

- Layout design and robot programming.
- Highly accurate simulation.
- Review the robot system with VR goggles.



Utilize ZDT to save manpower for maintenance


- Zero downtime with failure prediction.
- Process status monitoring and traceability.
- Notification of optimal maintenance timing.




FANUC Robot Lineup





Collaborative Robot

FANUC Robot CRX		CRX-3 <i>i</i> A	CRX-5 <i>i</i> A	CRX-10 <i>i</i> A	CRX-10 <i>i</i> A/L	CRX-20 <i>i</i> A/L	CRX-30 <i>i</i> A
						CRX/20-14A	CRX/30-18A
	Controlled axes	6					
	Max. payload at wrist	3kg	5kg	10kg		20kg	30kg
	Motion range(X,Y) *To end of flange(J4=+90deg.)	692mm, 1384mm	994mm, 1988mm	1249mm, 2498mm	1418mm, 2836mm		1756mm(30kg payload mode), 3778mm 1889mm(25kg payload mode), 3778mm
	Repeatability	±0.02mm	±0.03mm	±0.04mm			±0.05mm
	Mass	11kg	25kg	40kg		41kg	135kg
	Installation	Floor, Upside-down, Angle					
	Matching controller	• R-30 <i>i</i> B Mini Plus ... CRX-3 <i>i</i> A, 5 <i>i</i> A, 10 <i>i</i> A, 10 <i>i</i> A/L, 20 <i>i</i> A/L, 30 <i>i</i> A • R-50 <i>i</i> A(A-Cabinet), R-50 <i>i</i> A Mate ... CRX/20-14A, 30-18A					
	Application	Handling, Assembling, Arc welding					


FANUC Robot CR		CR/50F-16B					
	Controlled axes	6					
	Max. payload at wrist	50kg					
	Motion range(X,Y)	1643mm(50kg payload mode), 3266mm 1831mm(35kg payload mode), 3266mm					
	Repeatability	±0.03mm					
	Mass	386kg					
	Installation	Floor					
	Matching controller	R-50iA(A-Cabinet)					
	Application	Handling, Assembling					


SCARA Robot


FANUC Robot SR		SR-3iA	SR-3iA/H	SR-6iA	SR-6iA/H	SR-12iA	SR-20iA
	Controlled axes	4	3	4	3	4	
	Max. payload at wrist	3kg		6kg		12kg	20kg
	Motion range(X,Y)	400mm, 800mm		650mm, 1300mm		900mm, 1800mm	1100mm, 2200mm
	Stroke(Z)	200mm		210mm		300mm(option: 450mm)	
	Repeatability	J1+J2 axis J3 stroke J4 axis		±0.01mm	±0.01mm		±0.02mm
	Mass	±0.004deg.	-	±0.004deg.	-	±0.005deg.	
	Installation	19kg	17kg	30kg	28kg	53kg	64kg
	Matching controller	R-30iB Compact Plus					
	Application	Handling					

FANUC Robot SR		SR-3iA/C	SR-6iA/C	SR-12iA/C	SR-3iA/U	SR-9iA/R
	Controlled axes			4		
	Max. payload at wrist	3kg	6kg	12kg	3kg	9kg
	Motion range(X,Y)	400mm, 800mm	650mm, 1300mm	900mm, 1800mm	350mm, 700mm	620mm, 1240mm
	Stroke(Z)	200mm	210mm	300mm(option: 450mm)	140mm	200mm
	Repeatability	J1+J2 axis J3 stroke J4 axis		±0.01mm ±0.01mm		
	Mass	±0.004deg.		±0.005deg.		±0.004deg.
	Installation	21kg	32kg	56kg	27kg	76kg
	Matching controller	R-30iB Compact Plus				R-30iB Mate Plus
	Application	Handling, Clean room				Handling

Delta Robot

FANUC Robot DR		/05-3A-6X	/05-3A	/05-4A-6X	/05-4A
	Controlled axes	6	4	6	4
	Max. payload at wrist		0.5kg(option: 1kg)		
	Motion range(X,Y)	φ280mm, 100mm		φ420mm, 150mm	
	Repeatability		±0.02mm		
	Mass(without stand)	17kg	14kg	20kg	17kg
	Installation	Floor, Upside-down, Angle			
	Matching controller	R-50iA Mate			
	Application	Handling, Assembling	Handling	Handling, Assembling	Handling


FANUC Robot DR		/3-8A	/3-11A	/6-14A	/12-14A-3X
	Controlled axes		4	4	3
	Max. payload at wrist		3kg	6kg(option: 8kg)	12kg
	Motion range(X,Y)	φ800mm, 300mm	φ1130mm, 400mm	φ1350mm, 500mm	
	Repeatability		±0.03mm		
	Mass	130kg		160kg	155kg
	Installation	Upside-down			
	Matching controller	R-50iA(A-Cabinet), R-50iA Mate			
	Application	Handling			

FANUC Robot DR		/6-12B Stainless	/8-16B Stainless	/8-16B
	Controlled axes		4	
	Max. payload at wrist	6kg	8kg	
	Motion range(X,Y)	φ1200mm, 450mm	φ1600mm, 500mm	
	Repeatability		±0.03mm	
	Mass	250kg	260kg	170kg
	Installation	Upside-down		
	Matching controller	R-50iA(A-Cabinet), R-50iA Mate		
	Application	Handling		



LR Mate /7-7D LR Mate /10-11A LR Mate /25-19A ARC Mate/16-11D M-10/16-11D ARC Mate/12-14D M-10/12-14D ARC Mate/25-18D M-20/25-18D ARC Mate/12-23D M-20/12-23D M-710/50-26D M-710/20-31C M-800/60-20B M-810/270-27B

Small/Medium Size Robot, Arc Welding Robot


FANUC Robot LR Mate		/4-6D Entry	/4-6D	/7-7D	/14-7D	/7-9D	/14-9D
FANUC Robot ARC Mate							
	Controlled axes	6					
	Max. payload at wrist	4kg		7kg	14kg	7kg	14kg
	Motion range(X,Y)	550mm, 970mm		717mm, 1274mm		911mm, 1643mm	911mm(load capacity<12kg), 1643mm 820mm(load capacity≥12kg), 1643mm
	Repeatability	±0.01mm					
	Mass	20kg		25kg		27kg	
	Installation	Floor, Upside-down		Floor, Upside-down, Angle			
	Matching controller	R-50iA Mate					
	Application	Handling, Assembling	Handling, Assembling, Arc welding, Sealing, Mold release spray, Deburring				

FANUC Robot LR Mate		/7-7D Wash	/7-7D Food/Clean	/7-9D Food/Clean	/7-7D-5X
	Controlled axes	6			
	Max. payload at wrist	7kg			
	Motion range(X,Y)	717mm, 1274mm		911mm, 1643mm	717mm, 1274mm
	Repeatability	±0.01mm			
	Mass	27kg	25kg	27kg	24kg
	Installation	Floor, Upside-down, Angle			
	Matching controller	R-50iA Mate			
Application		Handling, Washing	Handling, Assembling, Clean room		Handling

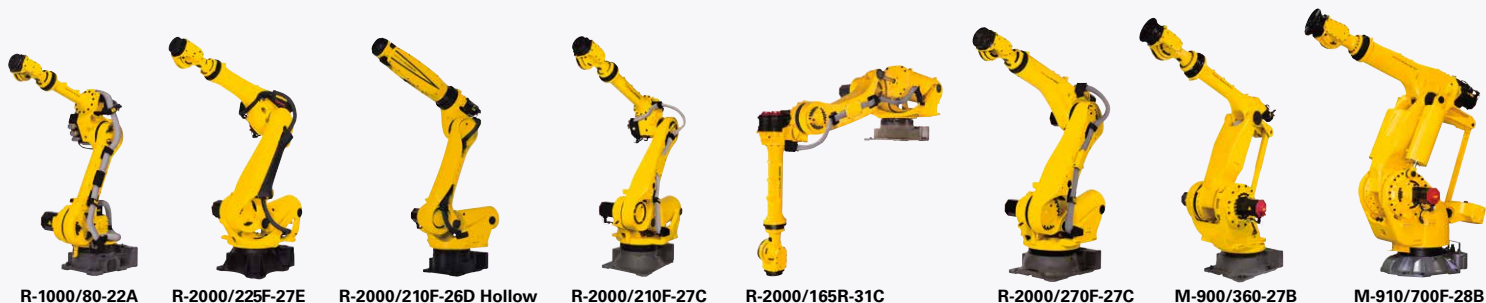
FANUC Robot LR Mate		/10-11A	/10-11A Food/Clean	/25-19A	/25-19A Food/Clean	/35-14A
	Controlled axes	6				
	Max. payload at wrist	10kg		25kg		35kg
	Motion range(X,Y)	1101mm, 1988mm		1853mm, 3345mm		1445mm, 2591mm
	Repeatability	±0.01mm		±0.02mm		
	Mass	46kg		210kg		205kg
	Installation	Floor, Upside-down, Angle				
	Matching controller	R-50iA Mate		R-50iA(A-B-C-Cabinet), R-50iA Mate		
Application		Handling, Assembling, Sealing, Mold release spray, Deburring	Handling, Assembling, Clean room	Handling, Assembling, Arc welding, Sealing, Deburring	Handling, Assembling, Clean room	Handling, Assembling, Arc welding, Sealing, Deburring

FANUC Robot ARC Mate		/16-11D		/12-14D		/10-16D		/8-20D	
FANUC Robot M-10									
	Controlled axes	6							
	Max. payload at wrist	16kg		12kg		10kg		8kg	
	Motion range(X,Y)	1103mm, 1977mm		1441mm, 2616mm		1636mm, 3006mm		2032mm, 3762mm	
	Repeatability	±0.02mm				±0.03mm			
	Mass	145kg				150kg		180kg	
	Installation	Floor, Upside-down, Angle *Floor, Upside-down for 4BK							
	Matching controller	R-50iA(A-B-C-Cabinet), R-50iA Mate							
Application		Handling, Assembling, Arc welding, Sealing, Deburring							

FANUC Robot ARC Mate		/25-18D		/35-18D		/12-23D	
FANUC Robot M-20							
	Controlled axes	6					
	Max. payload at wrist	25kg		35kg		12kg	
	Motion range(X,Y)	1831mm, 3461mm				2272mm, 4343mm	
	Repeatability	±0.02mm		±0.03mm			
	Mass	250kg					
	Installation	Floor, Upside-down, Angle					
	Matching controller	R-50iA(A-B-C-Cabinet), R-50iA Mate					
Application		Handling, Assembling, Arc welding, Sealing, Deburring					

FANUC Robot M-710		/50-26D		/70-21D		/12-31C		/20-31C		/20-26C		/50-20C-5X	
	Controlled axes					6						5	
	Max. payload at wrist	50kg		70kg		12kg		20kg				50kg	
	Motion range(X,Y)	2606mm, 4758mm		2104mm, 3788mm		3123mm, 5609mm		3110mm, 5583mm		2582mm, 4609mm		2003mm, 3451mm	
	Repeatability	±0.04mm		±0.03mm				±0.06mm				±0.03mm	
	Mass	600kg		580kg		540kg		530kg				540kg	
	Installation							Floor, Upside-down, Angle				Floor, Upside-down	
	Matching controller							R-50iA(A-B-C-Cabinet)					
Application		Handling, Assembling, Arc welding, Sealing, Spot welding, Deburring, Laser cutting										Handling	

FANUC Robot M-800		/60-20B		/190-20B		/270-27B	
FANUC Robot M-810							
	Controlled axes			6			
	Max. payload at wrist	60kg		190kg		270kg	
	Motion range(X,Y)	2040mm, 3221mm		2040mm, 2739mm		2687mm, 3787mm	
	Repeatability	±0.015mm		±0.02mm		±0.03mm	
	Mass	820kg		1360kg		1430kg	
	Installation			Floor			
	Matching controller			R-50iA(A-B-C-Cabinet)			
	Application	Laser machining, Sealing, Machining				Machining	



R-1000/80-22A

R-2000/225F-27E

R-2000/210F-26D Hollow

R-2000/210F-27C


R-2000/165R-31C

R-2000/270F-27C


M-900/360-27B


M-910/700F-28B


Small/Medium Size Robot


FANUC Robot R-1000		/80-22A	/100-22A	/130-22A
	Controlled axes	6		
	Max. payload at wrist	80kg	100kg	130kg
	Motion range(X,Y)	2230mm, 3738mm		
	Repeatability	±0.03mm		
	Mass	620kg	665kg	675kg
	Installation	Floor, Upside-down		
	Matching controller	R-50iA(A,B,C-Cabinet)		
	Application	Handling, Assembling, Sealing, Spot welding		


Large Size Robot

FANUC Robot R-2000		/180F-27E	/225F-27E	/300F-27E	/125F-31E	/210F-31E	/210R-31E	/270R-31E	/120R-39E	
	Controlled axes	6								
	Max. payload at wrist	180kg	225kg (option: 240kg)	300kg	125kg	210kg		270kg	120kg	
	Motion range(X,Y)	2655mm, 3414mm			3100mm, 4304mm		3095mm, 4733mm		3905mm, 6347mm	
	Repeatability	±0.05mm								
	Mass	1105kg		1365kg	1125kg	1390kg	1335kg	1570kg	1540kg	
	Installation	Floor					Rack			
	Matching controller	R-50iA(A-B-C-Cabinet)								
	Application	Handling, Assembling, Sealing, Spot welding, Press to press handling, Deburring								

FANUC Robot R-2000		/100F-26D Hollow	/165F-26D Hollow	/210F-26D Hollow	/165F-27C	/210F-27C	/240F-27C	/125F-31C
	Controlled axes	6						
	Max. payload at wrist	100kg	165kg	210kg	165kg	210kg	240kg	125kg
	Motion range(X,Y)	2605mm, 3315mm			2655mm, 3414mm			3100mm, 4304mm
	Repeatability	±0.05mm						
	Mass	1150kg			1090kg			1115kg
	Installation	Floor						
	Matching controller	R-50iA(A-B-C-Cabinet)						
	Application	Handling, Assembling, Sealing, Spot welding, Press to press handling, Deburring						



FANUC Robot R-2000		/270F-27C	/210F-31C	/165R-31C	/210R-31C	/270R-31C	/100R-35C
	Controlled axes	6					
	Max. payload at wrist	270kg (option: 300kg)	210kg	165kg	210kg	270kg	100kg
	Motion range(X,Y)	2655mm, 3414mm	3100mm, 4304mm	3095mm, 4733mm			3540mm, 5623mm
	Repeatability	±0.05mm					
	Mass	1320kg	1350kg	1370kg		1590kg	1495kg
	Installation	Floor		Rack			
	Matching controller	R-50iA(A-B-C-Cabinet)					
	Application	Handling, Assembling, Sealing, Spot welding, Press to press handling, Deburring					

FANUC Robot R-2000		/190-20C	/220U-25C	/210F-25C Wash
	Controlled axes	6		
	Max. payload at wrist	190kg	220kg	210kg
	Motion range(X,Y)	2040mm, 3170mm	2518mm, 3414mm	2450mm, 3415mm
	Repeatability	±0.03mm	±0.05mm	±0.10mm
	Mass	1120kg	1020kg	1180kg
	Installation	Floor, Upside-down	Upside-down	Floor
	Matching controller	R-50iA(A,B,C-Cabinet)		
	Application	Handling, Assembling, Sealing, Spot welding, Press to press handling, Deburring		Washing


FANUC Robot M-900		/360-27B		/280-31B		/280-27B		/330F-32B		/200R-35A					
FANUC Robot M-910												/700F-28B		/400F-37B	
	Controlled axes	6													
	Max. payload at wrist	360kg	280kg			330kg		200kg		700kg		400kg			
	Motion range(X,Y)	2655mm, 3308mm	3103mm, 4200mm	2655mm, 3308mm	3203mm, 3539mm	3507mm, 3876mm	2832mm, 3288mm	3704mm*, 4621mm							
	Repeatability	±0.1mm													
	Mass	1540kg	1600kg	1700kg	1780kg	2670kg	3030kg	3150kg							
	Installation	Floor, Upside-down, Angle					Floor		Rack		Floor				
	Matching controller	R-50iA(A-B,C-Cabinet)							R-50iA(B,C-Cabinet)		R-50iA(B-Cabinet)				
	Application	Handling, Assembling, Sealing, Spot welding, Press to press handling, Deburring													

* Wrist motion is restricted when the wrist payload is over 300kg.




FANUC Robot M-950		/500F-28A		/1000F-33A		/550F-46A			
FANUC Robot M-1000									
	Controlled axes	6		6		6			
	Max. payload at wrist	500kg		1000kg		550kg			
	Motion range(X,Y)	2830mm, 3610mm		3253mm, 4297mm		4601mm, 6473mm			
	Repeatability	±0.08mm		±0.10mm					
	Mass	2500kg		5300kg		5800kg			
	Installation	Floor							
	Matching controller	R-50iA(B-,C-Cabinet)		R-50iA(A-,B-,C-Cabinet)					
Application	Handling								
FANUC Robot M-2000		/1200F-37A		/900F-47A		/2300F-37A		/1700F-47A	
	Controlled axes	6		6		6		6	
	Max. payload at wrist	1200kg(option: 1350kg)		900kg		2300kg		1700kg	
	Motion range(X,Y)	3734mm, 4683mm		4683mm, 6209mm		3734mm, 4683mm		4683mm, 6209mm	
	Repeatability			±0.18mm				±0.27mm	
	Mass	8600kg		9600kg		11000kg		12500kg	
	Installation	Floor							
	Matching controller	R-50iA(A-,B-,C-Cabinet)							
Application	Handling								


Large-size Palletizing Robot


FANUC Robot M-410		/110F-24C		/140F-29B-5X		/185F-31C		/315F-31C		/500F-31C		/800F-32C	
	Controlled axes	4		5		4		4		4		4	
	Max. payload at wrist	110kg		140kg		185kg		315kg		500kg		800kg	
	Motion range(X,Y)	2403mm, 2238mm		2850mm, 3546mm		3143mm, 2958mm						3203mm, 3028mm	
	Repeatability					±0.05mm						±0.04mm	
	Mass	1030kg		1200kg		Pedestal type base 1615kg ^{*1)} Compact base 1330kg ^{*2)}		Pedestal type base 2410kg ^{*1)} Compact base 1910kg ^{*2)}				2500kg	
	Installation	Floor				Floor							
	Matching controller	R-50iA(A-,B-,C-Cabinet)											
	Application	Handling				Handling							


*1) Controller mass(120kg) is included. *2) Controller mass(120kg) is not included.

Paint Robot

FANUC Robot CRX		CRX-10iA/L Paint	
	Controlled axes	6	
	Max. payload at wrist	10kg	
	Motion range(X,Y)	1418mm, 2836mm *To end of flange(J4=+90deg.)	
	Repeatability	±0.04mm	
	Mass	47kg	
	Installation	Floor, Upside-down, Angle	
	Matching controller	R-30iB Mini Plus	
Application	Painting		


FANUC Robot P-40iA, P-350iA, P-250iB		P-40iA	P-350iA/45	P-250iB/15
	Controlled axes	6		
	Max. payload at wrist	5kg	45kg	15kg
	Motion range(X,Y)	1300mm, 2308mm	2606mm, 4575mm	2800mm, 5272mm
	Repeatability	±0.03mm	±0.06mm	±0.2mm
	Mass	110kg	590kg	530kg
	Installation	Floor, Upside-down, Wall, Rack, Angle		
	Matching controller	R-30iB Mate Plus	R-30iB Plus(A-Cabinet)	
Application	Painting			

FANUC Robot P-1000iA		P-1000iA
	Controlled axes	7
	Max. payload at wrist	15kg
	Motion range(X,Y)	3396mm, 4391mm(Metal arm) 3348mm, 4343mm(Plastic arm)
	Repeatability	±0.08mm
	Mass	700kg
	Installation	Wall
	Matching controller	R-30iB Plus(A-Cabinet)
Application	Painting	

FANUC Robot P-55		P-55/15-21A
	Controlled axes	6
	Max. payload at wrist	15kg
	Motion range(X,Y)	2050mm, 3743mm
	Repeatability	±0.07mm
	Mass	430kg
	Installation	Floor, Upside-down, Wall, Rack, Angle
	Matching controller	R-50iA(C-Cabinet)
Application	Painting	

Wide range of applications

- A wide range of lineups that can be used in various manufacturing applications.



Load/Unload



Spot Welding



Arc Welding



Laser machining



Sealing




Washing



Painting



Palletizing



Polishing, Deburring



Machining




Inspection



Logistics



Food Packing



Pharmaceuticals

Reliable Support System

- Fully supported by dedicated and knowledgeable technical staff.
- A wide variety of in person and hands-on training courses are available.



(Headquarters area)



(Nagoya branch)



Academy

Complete maintenance system

FANUC service team delivers customer trust and confidence based on direction of service “Maximizing Uptime”, “Global Service” and “Lifetime maintenance”.

Service First

Conforming to the spirit of “Service First”, FANUC provides lifetime maintenance to its products for as long as they are used by customers, through more than 270 service locations supporting more than 100 countries and regions throughout the world.

Maximizing Uptime



Compliant with various safety standards



- Strict quality control.
- Compliant with safety standards of each country.

Sustainability efforts



FANUC continues to contribute to the sustainability of society through continuous technological innovations that help overcome environmental and social challenges.

Robot Controller R-50iA

Compact & high-performance control

- High speed processing with multi-core CPU.

Environmentally Conscious Design

- Reduce power consumption with low power consumption fan, amplifier with low loss power element, and highly efficient brake control.



Reliable cyber security measures

- World's first* robot controller to receive international certification.

*According to FANUC's research

- IEC62443-4-1, IEC62443-4-2

Productive system setup function

- Reduce setup time and costs with a variety of interfaces.
- Python, Visual Studio Code, Software PLC, ROS 1 / ROS 2, PLC Motion Interface



*Python is a registered trademark of the Python Software Foundation.

*Visual Studio Code is a registered trademark of Microsoft Corporation.

*ROS 1 and ROS 2 are a trademark of Open Source Robotics Foundation.

Teach Pendant



Combines ease of use and excellent design, reducing operator stress



- Class-leading lightweight
- Large screen with high resolution
- Ergonomic design fits comfortably in the hand
- High performance, high sensitivity touch panel (Operable even with gloves)
- Smartphone-like smooth operation



R-50iA Introduction



Teach Pendant Introduction

Controller Specification

	R-50 <i>i</i> A A-Cabinet	R-50 <i>i</i> A B-Cabinet	R-50 <i>i</i> A C-Cabinet	R-50 <i>i</i> A Mate	R-30 <i>i</i> B Mini Plus	R-30 <i>i</i> B Compact Plus
Rated Supply Voltage	200 to 575V AC +10% – 15% 50/60Hz ± 1Hz, 3-Phase			200 to 240V AC +10% – 15% 50/60Hz ± 1Hz, 1/3-Phase	100 to 120V AC +10% – 10% 200 to 240V AC +10% – 15% 50/60Hz ± 1Hz, 1-Phase	200 to 240V AC +10% – 15% 50/60Hz ± 1Hz, 1-Phase
Mass(kg)	120 to 140 ^{NOTE1)}	180 to 200 ^{NOTE1)}	190 to 210 ^{NOTE1)}	35/40 ^{NOTE1)}	20/22 ^{NOTE1)}	9
Dimensions(mm) W×D×H	600×470×500	600×550×950	740×600×870	470×322×400 470×402×400 ^{NOTE1)}	410×277×370	440×260×85.5
Protection Class	IP54					IP20
Safety Function	Emergency stop function Position/Speed check function			PL=e, Cat4 (ISO13849-1) SIL3 (IEC61508) PL=d, Cat3 (ISO13849-1) SIL2 (IEC61508)		
External Memory	USB, SD				USB	
Field Network	Ethernet, DeviceNet, PROFINET, CC-Link, CC-Link IE ^{NOTE2)} , EtherNet/IP, EtherCAT					
Supported Robot Model	Refer to the Matching controller row on the robot line-up table				CRX	SR

NOTE1: These values differ depending on the robot model. NOTE2: Excludes R-30iB Compact Plus.

FANUC CORPORATION

● Overseas Affiliated Companies
FANUC America Corporation
FANUC Europe Corporation, S.A.
SHANGHAI-FANUC Robotics CO., LTD.
KOREA FANUC CORPORATION
TAIWAN FANUC CORPORATION
FANUC INDIA PRIVATE LIMITED
FANUC SINGAPORE PTE. LTD.
FANUC THAI LIMITED
FANUC MECHATRONICS (MALAYSIA) SDN. BHD.
PT. FANUC INDONESIA
FANUC OCEANIA PTY. LIMITED
FANUC SOUTH AFRICA (PROPRIETARY) LIMITED

Phone: (+1)248-377-7000
Phone: (+352)727777-1
Phone: (+86)21-5032-7700
Phone: (+82)55-278-1200
Phone: (+886)4-2359-0522
Phone: (+91)80-2852-0057
Phone: (+65)6567-8566
Phone: (+66)2-714-6111
Phone: (+60)3-3082-1222
Phone: (+62)21-4584-7285
Phone: (+61)2-8822-4600
Phone: (+27)11-392-3610

● Headquarters 3580, Shibokusa, Oshino-mura, Minamitsuru-gun
Yamanashi, 401-0597, JAPAN
Phone: (+81)555-84-5555 <https://www.fanuc.co.jp/>

<https://www.fanucamerica.com/>
<https://www.fanuc.eu/>
<https://www.shanghai-fanuc.com.cn/>
<https://www.fkc.co.kr/>
<https://www.fanuctaiwan.com.tw/>
<https://www.fanucindia.com/>
<https://www.fanuc.com/fsp/>
<https://www.fanuc.com/fth/>
<https://www.fanuc.com/fmm/>
<https://www.fanuc.com/fiin/>
<https://www.fanucoceania.com.au/>
<https://www.fanuc.co.za/>



ROBOT Product
Brochures

● All specifications are subject to change without notice.
● No part of this catalog may be reproduced in any form.
● The products in this catalog are controlled based on Japan's "Foreign Exchange and Foreign Trade Law". The export from Japan may be subject to an export license by the government of Japan. Further, re-export to another country may be subject to the license of the government of the country from where the product is re-exported. Furthermore, the product may also be controlled by re-export regulations of the United States government. Should you wish to export or re-export these products, please contact FANUC for advice.

© FANUC CORPORATION, 2024

Robot_General(E)-05, 2026.4, Printed in Japan